

# 4K Ultra HD Smart TV with Pro:Centric





Pro:Centric Cloud





# UM670H Series

		15/10/24 1/4 1/9 21/0 (0.07)
Design	Stand Type	65": 1 pole (Fixed) 55" / 50" / 43": 1 pole (Swivel)
		33 / 30 / 43 . 1 pole (3wivel)
D is p lay	Siz e s	65" / 55" / 50" / 43"
	Resolution	3,840 × 2,160 (4K UHD)
Broadcasting System	Digital	ATSC, Clear QAM
	Analog	NTSC
	65" / 55": 300	300
VESA	50" / 43": 200	



# Pro:Centric Cloud

Pro:Centric Cloud provides a convenient cloud-based environment for content management systems and other third-party software solutions that can be installed, updated and controlled from a central location. It also offers various design templates that provide eye-catching dashboards for analytics and data collection. In addition, the LG Channels app provides a convenient way to access a wide range of content from over-the-top channels (including broadcast TV) without additional devices or subscriptions. And LG's Mobile Application Creator simplifies the process of setting up concierge services on mobile devices for guests.



### **Pro:Centric Direct**

The Pro:Centric Direct hotel content management solution offers simple editing tools, making it easy to perform service and IP network-based remote management with a single click. Pro:Centric Direct enables users to customize their interface easily and efficiently manage all TVs in the facility. The most recent version\* provides IoT-based in-room control as well as voice control through LG Natural Language Processing.

\* Some features may not be supported based on PCD versions.



# Pro:Idiom

DRM (digital rights management) technology unlocks access to premium content to help assure rapid and broad deployment of HDTV and other high-value digital content. DRM technology also prevents any illegal copying of content.



# Slim Depth for a Sleek Look


With a slim design, the UM670H series integrates smoothly with interiors, delivering a modern impression to your guests.



# SoftAP

Software-enabled Access Point\* (SoftAP) is a virtual Wi-Fi feature that uses TV as a wireless hotspot, enabling guests to connect their own devices to the SoftAP.

 $\ensuremath{^{*}}$  Screen Share may not be operated at the same time.

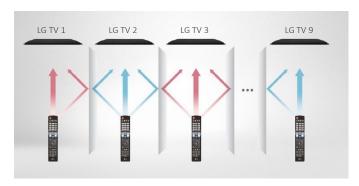

# Multi-code IR

Multi-code IR\* function eliminates any remote-control signal interaction between multiple TVs in one place. LG hospital TV supports this when used with the Multi-code IR remote control, so users can freely control their own TVs without disturbing the others.

\* Multi-code IR remote control is not provided by LG. (sold separately)



# Voice Recognition


Voice recognition, using the LG Magic Motion Remote\* with the UM670H Series makes it easy to control the TV without pressing the button of remote controls.

\* Magic Motion Remote is required (sold separately)

### CONNECTIVITY

65" / 55" / 50" / 43"

Rear

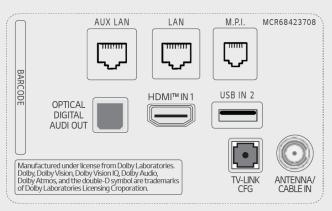

Side



<u> </u>					
Category	Category	Pro:Centric Smart	Pro:Centric Smart	Pro:Centric Smart	Pro:Centric Smart
Display	Diagonal	65"	55"	50"	43"
	Resolution	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)
	Backlight Cabinet Type	Direct	Direct	Direct	Direct
	Brightness	330 nits	330 nits	330 nits	265 nits
	Dynamic Contrast Ratio	1,000,000:1	1,000,000:1	1,000,000:1	1,000,000:1
	Static (Panel) Contrast Ratio	1,200:1	1,300:1	5,000:1	1,200:1
	Response Time	8 ms (G to G)	14 ms (G to G)	19 ms (G to G)	8 ms (G to G)
	Refresh Rate	60 Hz	60 Hz	60 Hz	60 Hz
	Life Span	30,000 Hrs.	30,000 Hrs.	30,000 Hrs.	30,000 Hrs.
Video	Al Picture Pro	Yes	Yes	Yes	Yes
	Dynamic Vivid	Yes	Yes	Yes	Yes
	HDR 10 Pro / HDR HLG	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes
	Game Optimizer	Yes	Yes	Yes	Yes
Audio	Speaker (Sound Output)	10 W + 10 W	10 W + 10 W	10 W + 10 W	10 W + 10 W
	Speaker System	2.0 ch	2.0 ch	2.0 ch	2.0 ch
	Al Sound Pro / Al Sound	Yes	Yes	Yes	Yes
	Al Acoustic Tuning	Yes (Ready)	Yes (Ready)	Yes (Ready)	Yes (Ready)
	LG Sound Sync	Optical/Bluetooth wireless	Optical/Bluetooth wireless	Optical/Bluetooth wireless	Optical/Bluetooth wireless
Broadcasting – System _	Digital (Terrestrial / Cable / Satellite)	ATSC, Clear QAM	ATSC, Clear QAM	ATSC, Clear QAM	ATSC, Clear QAM
	Analog (NTSC / SECAM / PAL)	NTSC	NTSC	NTSC	NTSC
	Global IPTV Support	Yes	Yes	Yes	Yes
Hospitality	0 L 1: T				
	Solution Type	Pro:Centric (Smart, Cloud, Direct, V)	Pro:Centric (Smart, Cloud, Direct, V)	Pro:Centric (Smart, Cloud, Direct, V)	Pro:Centric (Smart, Cloud, Direct,
Solution Smart Features	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfa	Yes ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAl onnection Overlay, HDMI-ARC (HDMI 2),	Pro:Centric (Smart, Cloud, Direct, V)  Yes  y Mode, Quick Access, Web Browser, SD P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (H	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, ), IoT, EZ-Manager, USB Cloning, Wake	Yes ompatibility (MR18HA), on RF, WOL,
Solution	Pro:ldiom (S/W Type), (Mobile, Lite)  webOS23 User Interfa  Mobile Co Diagnostics  External	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAl onnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M  Installer Menu, Lock Mode (Limited), Pc (Speaker Out (R: 1.0 W, I: 1.0 W, 8 O), II emote, Moving Picture Playback (SD/HD	Yes  y Mode, Quick Access, Web Browser, SDP, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagenstant On, VLAN ID, RJP (Remote Jack Pa/Plus HD), Auto Off / Sleep Timer, Energ	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, ), IoT, EZ-Manager, USB Cloning, Wake of IDMI-CEC) (1.4), IR Out (MPI, RS-232C),  ), Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (if y Saving Mode, Motion Eye Care, b-LAN	ompatibility (MR18HA), on RF, WOL, Multi-code IR  I) HDMI-CEC),
Solution  Smart Features  Hospitality	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfe  Mobile Co Diagnostics  External Mobile Re	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAlonnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M  Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, 1: 1.0 W, 8 Q), II  emote, Moving Picture Playback (SD/HD  Anti-theft System (Kensington Li	Yes  y Mode, Quick Access, Web Browser, SD, p, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (F  ort Block, Welcome Screen (Splash Image nstant On, VLAN ID, RIP (Remote Jack Pe /Plus HD), Auto Off / Sleep Timer, Energ ock, Credenza/Security Aperture (Except	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, ), IoT, EZ-Manager, USB Cloning, Wake o IDMI-CEC) (1.4), IR Out (MPI, RS-232C), ), Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (I y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")	Yes  compatibility (MR18HA),  on RF, WOL,  Multi-code IR  1)  1)  1)  1)  1)  1)  1)  1)  1)  1
Solution  Smart Features  Hospitality Features	Pro:ldiom (S/W Type), (Mobile, Lite)  webOS23 User Interfa  Mobile Co Diagnostics  External	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAl onnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M  Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, I: 1.0 W, 8 O), II emote, Moving Picture Playback (SD/HD  Anti-theft System (Kensington L  HDMI In x2 (2.0), USB	Yes  y Mode, Quick Access, Web Browser, SD, p, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (F ort Block, Welcome Screen (Splash Image nstant On, VLAN ID, RIP (Remote Jack Pa /Plus HD), Auto Off / Sleep Timer, Energ ock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, ), IoT, EZ-Manager, USB Cloning, Wake of IDMI-CEC) (1.4), IR Out (MPI, RS-232C),  ), Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (IV y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi	Yes  Compatibility (MR18HA),  Con RF, WOL,  Multi-code IR  1)  HDMI-CEC),  embedded  ce Only (3.5 mm TRS)
Smart Features Hospitality Features	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfe  Mobile Co Diagnostics  External Mobile Re	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAlonnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), I emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L	Yes  y Mode, Quick Access, Web Browser, SD, p, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (F  ort Block, Welcome Screen (Splash Image nstant On, VLAN ID, RIP (Remote Jack Pe /Plus HD), Auto Off / Sleep Timer, Energ ock, Credenza/Security Aperture (Except	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake (IDMI-CEC) (1.4), IR Out (MPI, RS-232C), J), Insert Image, One Channel Map (LCM ck) Compatibility (Teleadapt/Guestlink (I y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi In (Dual b-LAN), Optical Digital Audio Out (10.5 me 20.5	Yes  Ompatibility (MR18HA),  On RF, WOL,  Multi-code IR  1)  HDMI-CEC),  embedded  ce Only (3.5 mm TRS)
Solution  Smart Features  Hospitality Features	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfe  Mobile Co Diagnostics  External Mobile Ro	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAlonnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Ω), I emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L	Yes  y Mode, Quick Access, Web Browser, SD, P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution IPI, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagenstant On, VLAN ID, RJP (Remote Jack Pa/Plus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake (IDMI-CEC) (1.4), IR Out (MPI, RS-232C), J), Insert Image, One Channel Map (LCM ck) Compatibility (Teleadapt/Guestlink (I y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi In (Dual b-LAN), Optical Digital Audio Out (10.5 me 20.5	Yes  Ompatibility (MR18HA),  On RF, WOL,  Multi-code IR  1)  HDMI-CEC),  embedded  ce Only (3.5 mm TRS)
Solution  Smart Features  Hospitality Features	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfe Mobile Co Diagnostics  External Mobile Ro  Set Side  Set Rear	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAlonnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Q), I emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L: HDMI In x2 (2.0), USB	Yes  y Mode, Quick Access, Web Browser, SD, P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (F  ort Block, Welcome Screen (Splash Image nstant On, VLAN ID, RIP (Remote Jack Pa /Plus HD), Auto Off / Sleep Timer, Energ ock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea  DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), L	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IOT, EZ-Manager, USB Cloning, Wake of IDMI-CEC) (1.4), IR Out (MPI, RS-232C), Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (Iv Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi  In (Dual b-LAN), Optical Digital Audio Ol AN (RJ45), Aux LAN (RJ45), MPI Port (RJ1	Yes  Ompatibility (MR18HA),  On RF, WOL,  Multi-code IR  1)  HDMI-CEC),  embedded  ce Only (3.5 mm TRS)  ut,  2)
Solution  Smart Features  Hospitality Features	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfe Mobile Co Diagnostics  External Mobile Ro  Set Side  Set Rear  VESA Compatible	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAlonnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M  Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Q), It emote, Moving Picture Playback (SD/HD  Anti-theft System (Kensington L:  HDMI In x2 (2.0), USB  HE TV- 300 × 300 mm	Yes  y Mode, Quick Access, Web Browser, SD, p, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (F  ort Block, Welcome Screen (Splash Image nstant On, VLAN ID, RIP (Remote Jack Pa P/Plus HD), Auto Off / Sleep Timer, Energ pock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea  DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), L  300 × 300 mm	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IOT, EZ-Manager, USB Cloning, Wake of IDMI-CEC) (1.4), IR Out (MPI, RS-232C), J, Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (I y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi In (Dual b-LAN), Optical Digital Audio On AN (RJ45), Aux LAN (RJ45), MPI Port (RJ1 200 × 200 mm	Yes  compatibility (MR18HA),  on RF, WOL,  Multi-code IR  1)  1)  1)  1)  1DMI-CEC),  embedded  ce Only (3.5 mm TRS)  ut,  2)  200 × 200 mm
Solution  Smart Features  Hospitality Features	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfe Mobile Co Diagnostics  External Mobile Re  Set Side  Set Rear  VESA Compatible Stand Type Front Color Dimensions without Stand	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAl Connection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 O), II emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L HDMI In x2 (2.0), USB  HE TV-  300 × 300 mm  1 pole (Fixed)  Dark Charcoal Gray  57.2 x 33 x 2.3 in.	y Mode, Quick Access, Web Browser, SD, P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (F ort Block, Welcome Screen (Splash Image nstant On, VLAN ID, RIP (Remote Jack Pa /Plus HD), Auto Off / Sleep Timer, Energ ock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea  DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), L  300 × 300 mm  1 pole (Swivel)  Dark Charcoal Gray 48.6 x 28.1 x 2.3 in.	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, ), IoT, EZ-Manager, USB Cloning, Wake of IDMI-CEC) (1.4), IR Out (MPI, RS-232C), ), Insert Image, One Channel Map (LCM ck) Compatibility (Teleadapt/Guestlink (Ity Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi In (Dual b-LAN), Optical Digital Audio OAN (RJ45), Aux LAN (RJ45), MPI Port (RJ1 200 × 200 mm 1 pole (Swivel)  Dark Charcoal Gray 44.1 x 25.6 x 2.2 in.	Yes  Tompatibility (MR18HA),  On RF, WOL,  Multi-code IR  1)  HDMI-CEC),  embedded  ce Only (3.5 mm TRS)  ut,  2)  200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  38.1 x 22.2 x 2.2 in.
Solution  Smart Features  Hospitality Features	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfe Mobile Co Diagnostics  External Mobile Ro  Set Side  Set Rear  VESA Compatible Stand Type Front Color Dimensions without Stand (W×H×D) Dimensions with Stand	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAlonnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Q), If emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L: HDMI In x2 (2.0), USB HD TV-300 x 300 mm  1 pole (Fixed)  Dark Charcoal Gray  57.2 x 33 x 2.3 in.  1,454 x 838 x 57.7 mm  57.2 x 35.8 x 13.4 in.	y Mode, Quick Access, Web Browser, SD, P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (F ort Block, Welcome Screen (Splash Image nstant On, VLAN ID, RIP (Remote Jack Pe P/Plus HD), Auto Off / Sleep Timer, Energ pock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), L  300 × 300 mm  1 pole (Swivel)  Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm  48.6 × 30.6 × 11.9 in.	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake of IDMI-CEC) (1.4), IR Out (MPI, RS-232C), Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (I y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi  In (Dual b-LAN), Optical Digital Audio Or AN (RJ45), Aux LAN (RJ45), MPI Port (RJ1 200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  44.1x 25.6x 2.2 in.  1,121 × 651 × 57.1 mm  44.1x 28.1x 11.9 in.	Yes  Compatibility (MR18HA),  Don RF, WOL,  Multi-code IR  1)  HDMI-CEC),  embedded  ce Only (3.5 mm TRS)  ut,  2)  200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  38.1 × 22.2 × 2.2 in.  967 × 564 × 57.1 mm  38.1 × 24.5 × 11.9 in.
Solution  Smart Features  Hospitality Features	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfe Mobile Co Diagnostics  External Mobile Re  Set Side  Set Rear  VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D)	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAlonnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Q), I emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L: HDMI In x2 (2.0), USB HDMI IN x2 (2.0), U	Yes  y Mode, Quick Access, Web Browser, SD, P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (F  ort Block, Welcome Screen (Splash Image nstant On, VLAN ID, RIP (Remote Jack Pa /Plus HD), Auto Off / Sleep Timer, Energ ock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea  DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), L  300 × 300 mm  1 pole (Swivel)  Dark Charcoal Gray  48.6 × 28.1 × 2.3 in, 1,235 × 715 × 57.5 mm  48.6 × 30.6 × 11.9 in, 1,235 × 777 × 303 mm	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake of IDMI-CEC) (1.4), IR Out (MPI, RS-232C), Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (Iv y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi  In (Dual b-LAN), Optical Digital Audio Ol AN (RJ45), Aux LAN (RJ45), MPI Port (RJ1 200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  44.1 x 25.6 x 2.2 in. 1,121 × 551 × 57.1 mm  44.1 x 28.1 x 11.9 in. 1,121 × 713 × 303 mm	Yes  Ompatibility (MR18HA),  On RF, WOL,  Multi-code IR  1)  HDMI-CEC),  embedded  ce Only (3.5 mm TRS)  ut,  2)  200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  38.1 × 22.2 × 2.2 in.  967 × 564 × 57.1 mm  38.1 × 24.5 × 11.9 in.  967 × 623 × 303 mm
Solution  Smart Features  Hospitality Features	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfe Mobile Co Diagnostics  External Mobile Ro  Set Side  Set Rear  VESA Compatible Stand Type Front Color Dimensions without Stand (W×H×D) Dimensions with Stand	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAlonnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Q), If emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L: HDMI In x2 (2.0), USB HD TV-300 x 300 mm  1 pole (Fixed)  Dark Charcoal Gray  57.2 x 33 x 2.3 in.  1,454 x 838 x 57.7 mm  57.2 x 35.8 x 13.4 in.	y Mode, Quick Access, Web Browser, SD, P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (F ort Block, Welcome Screen (Splash Image nstant On, VLAN ID, RIP (Remote Jack Pe P/Plus HD), Auto Off / Sleep Timer, Energ pock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), L  300 × 300 mm  1 pole (Swivel)  Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm  48.6 × 30.6 × 11.9 in.	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake of IDMI-CEC) (1.4), IR Out (MPI, RS-232C), Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (I y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi  In (Dual b-LAN), Optical Digital Audio Or AN (RJ45), Aux LAN (RJ45), MPI Port (RJ1 200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  44.1x 25.6x 2.2 in.  1,121 × 651 × 57.1 mm  44.1x 28.1x 11.9 in.	Yes  Compatibility (MR18HA),  Don RF, WOL,  Multi-code IR  1)  HDMI-CEC),  embedded  ce Only (3.5 mm TRS)  ut,  2)  200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  38.1 × 22.2 × 2.2 in.  967 × 564 × 57.1 mm  38.1 × 24.5 × 11.9 in.
Solution  Smart Features  Hospitality Features  Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfate Mobile Conception Diagnostics  External Mobile Reference  Set Side  Set Rear  VESA Compatible  Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Shipping Dimensions	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAl Synnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Q), II emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L HDMI In x2 (2.0), USB  HDMI In x2 (2.0), USB  HL TV-  300 × 300 mm  1 pole (Fixed)  Dark Charcoal Gray  57.2 × 33 × 2.3 in. 1,454 × 838 × 57.7 mm  57.2 × 35.8 × 13.4 in. 1,454 × 909 × 340 mm  63 × 38.2 × 9 in.	y Mode, Quick Access, Web Browser, SD, P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (F ort Block, Welcome Screen (Splash Image nstant On, VLAN ID, RIP (Remote Jack Pa (Plus HD), Auto Off / Sleep Timer, Energ ock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), L  300 × 300 mm  1 pole (Swivel)  Dark Charcoal Gray 48.6 x 28.1 x 2.3 in. 1,235 × 715 × 57.5 mm 48.6 x 30.6 x 11.9 in. 1,235 × 777 × 303 mm 53.5 x 33.9 x 8.1 in.	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J., IoT, EZ-Manager, USB Cloning, Wake of IDMI-CEC) (1.4), IR Out (MPI, RS-232C), J. Insert Image, One Channel Map (LCM ck) Compatibility (Teleadapt/Guestlink (IV Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi In (Dual b-LAN), Optical Digital Audio Olan (RJ45), Aux LAN (RJ45), MPI Port (RJ1 200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  44.1 x 25.6 x 2.2 in. 1,121 × 651 × 57.1 mm  44.1 x 28.1 x 11.9 in. 1,121 × 713 × 303 mm  51.9 x 31.9 x 7.4 in.	Yes  Tompatibility (MR18HA),  Ton RF, WOL,  Multi-code IR  Tollowided  Tollowi
Solution  Smart Features  Hospitality Features  Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfate Mobile Conception Diagnostics  External Mobile Reference  Set Side  Set Rear  VESA Compatible  Stand Type Front Color Dimensions without Stand (Wx H x D) Dimensions with Stand (Wx H x D) Shipping Dimensions (Wx H x D) Shipping Dimensions (Wx H x D)	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAl Synnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Q), II emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L HDMI In x2 (2.0), USB  HDMI In x2 (2.0), USB  HITTV-  300 × 300 mm  1 pole (Fixed)  Dark Charcoal Gray  57.2 × 33.8 × 13.4 in. 1,454 × 898 × 340 mm  63 × 38.2 × 9 in. 1,600 × 970 × 228 mm	y Mode, Quick Access, Web Browser, SD, P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (F ort Block, Welcome Screen (Splash Image nstant On, VLAN ID, RJP (Remote Jack Pa /Plus HD), Auto Off / Sleep Timer, Energ ock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea  DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), L  300 × 300 mm  1 pole (Swivel)  Dark Charcoal Gray 48.6 x 28.1 x 2.3 in. 1,235 × 715 × 57.5 mm 48.6 x 30.6 x 11.9 in. 1,235 × 777 × 303 mm  53.5 x 33.9 x 8.1 in. 1,360 × 860 × 207 mm	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J., IoT, EZ-Manager, USB Cloning, Wake of IDMI-CEC) (1.4), IR Out (MPI, RS-232C), J. Insert Image, One Channel Map (LCM ck) Compatibility (Teleadapt/Guestlink (IV Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi In (Dual b-LAN), Optical Digital Audio On AN (RJ4S), Aux LAN (RJ4S), MPI Port (RJ1 200 × 200 mm 1 pole (Swivel)  Dark Charcoal Gray 44.1 × 25.6 × 2.2 in. 1,121 × 651 × 57.1 mm 44.1 × 28.1 × 11.9 in. 1,121 × 713 × 303 mm 51.9 × 31.9 × 7.4 in. 1,317 × 810 × 188 mm	Yes  fompatibility (MR18HA),  on RF, WOL,  Multi-code IR  1)  HDMI-CEC),  embedded  ce Only (3.5 mm TRS)  ut,  2)  200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  38.1 × 22.2 × 2.2 in.  967 × 564 × 57.1 mm  38.1 × 24.5 × 11.9 in.  967 × 623 × 303 mm  42.3 × 26 × 8.0 in.  1,075 × 660 × 203 mm
Solution  Smart Features  Hospitality Features  Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfa Mobile Co Diagnostics  External Mobile Re  Set Side  Set Rear  VESA Compatible Stand Type Front Color  Dimensions without Stand (W × H × D) Dimensions with Stand (W × H × D) Shipping Dimensions (W × H × D) Weight without Stand	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAl Synnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 O), II emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L HDMI In x2 (2.0), USB  HT TV-  300 × 300 mm  1 pole (Fixed)  Dark Charcoal Gray  57.2 × 33 × 2.3 in. 1,454 × 838 × 57.7 mm  57.2 × 35.8 × 13.4 in. 1,454 × 909 × 340 mm  63 × 38.2 × 9 in. 1,600 × 970 × 228 mm  47.4 lbs. / 21.5 kg	y Mode, Quick Access, Web Browser, SDP, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagenstant On, VLAN ID, RIP (Remote Jack Pe/Plus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Speaton, Credenza/Security Aperture (Except In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), Lugardon Son Mineral Pole (Swivel)  Dark Charcoal Gray  48.6x 28.1x 2.3 in. 1,235 × 715 × 57.5 mm  48.6x 30.6x 11.9 in. 1,235 × 777 × 303 mm  53.5x 33.9x 8.1 in. 1,360 × 860 × 207 mm  30.9 lbs. / 14.0 kg	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J., IoT, EZ-Manager, USB Cloning, Wake of IDMI-CEC) (1.4), IR Out (MPI, RS-232C), J. Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (Iv y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi In (Dual b-LAN), Optical Digital Audio OAN (RJ45), Aux LAN (RJ45), MPI Port (RJ1 200 × 200 mm 1 pole (Swivel)  Dark Charcoal Gray 44.1 x 25.6 x 2.2 in. 1,121 × 651 × 57.1 mm 44.1 x 28.1 x 11.9 in. 1,121 × 713 × 303 mm 51.9 x 31.9 x 7.4 in. 1,317 × 810 × 188 mm 26.7 lbs. / 12.1 kg	Yes  fompatibility (MR18HA),  fon RF, WOL,  Multi-code IR  f)  HDMI-CEC),  embedded  ce Only (3.5 mm TRS)  ut,  2)  200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  38.1 × 22.2 × 2.2 in.  967 × 564 × 57.1 mm  38.1 × 24.5 × 11.9 in.  967 × 623 × 303 mm  42.3 × 26 × 8.0 in.  1,075 × 660 × 203 mm  19.4 lbs. / 8.8 kg
Solution  Smart Features  Hospitality Features  Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfe Mobile Co Diagnostics  External Mobile Re  Set Side  Set Rear  VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Shipping Dimensions (W x H x D) Weight without Stand Weight without Stand	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAlonnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, S 0), II emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L: HDMI In x2 (2.0), USB HT TV-  300 × 300 mm  1 pole (Fixed)  Dark Charcoal Gray  57.2 x 33 x 2.3 in. 1,454 × 388 × 57.7 mm  57.2 x 35.8 x 13.4 in. 1,454 × 909 × 340 mm  63 x 38.2 x 9 in. 1,600 × 970 × 228 mm  47.4 lbs. / 21.5 kg  50.5 lbs. / 22.9 kg	Yes  y Mode, Quick Access, Web Browser, SDP, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagenstant On, VLAN ID, RIP (Remote Jack Pa/Plus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Speaton (2.0), RS-232C In (3.5 mm TRRS), Speaton (S.5 mm TRS), (b-LAN Service), Land Screen (S.5 mm TRS), (b-LAN Service), Land Screen (S.5 mm TRS), Speaton (S.5 mm TRS),	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J., IoT, EZ-Manager, USB Cloning, Wake of IDMI-CEC) (1.4), IR Out (MPI, RS-232C), J. Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (Iv y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi In (Dual b-LAN), Optical Digital Audio O. AN (RJ45), Aux LAN (RJ45), MPI Port (RJ1 200 × 200 mm 1 pole (Swivel)  Dark Charcoal Gray 44.1 x 25.6 x 2.2 in. 1,121 × 651 × 57.1 mm 44.1 x 28.1 x 11.9 in. 1,121 × 713 × 303 mm 51.9 x 31.9 x 7.4 in. 1,317 × 810 × 188 mm 26.7 lbs. / 12.1 kg 33.7 lbs. / 15.3 kg	Yes  fompatibility (MR18HA), fon RF, WOL, Multi-code IR  f)  HDMI-CEC), embedded  ce Only (3.5 mm TRS)  ut, 2)  200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  38.1 × 22.2 × 2.2 in. 967 × 564 × 57.1 mm  38.1 × 24.5 × 1.19 in. 967 × 623 × 303 mm  42.3 × 26 × 8.0 in. 1,075 × 660 × 203 mm  19.4 lbs. / 8.8 kg  26.5 lbs. / 12.0 kg
Solution  Smart Features  Hospitality Features  Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfe Mobile Co Diagnostics  External Mobile Re  Set Side  Set Rear  VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Shipping Dimensions (W x H x D) Weight without Stand Weight without Stand	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAlonnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, 8 Q), I emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L: HDMI In x2 (2.0), USB HDMI In x2 (2.0), U	y Mode, Quick Access, Web Browser, SD, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagenstant On, VLAN ID, RIP (Remote Jack Pe/Plus HD), Auto Off / Sleep Timer, Energ pock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Speadom In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), L 300 × 300 mm 1 pole (Swivel)  Dark Charcoal Gray 48.6 x 28.1 x 2.3 in 1,235 × 715 × 57.5 mm 48.6 x 28.1 x 2.3 in 1,235 × 717 × 303 mm 53.5 x 33.9 x 8.1 in 1,360 × 860 × 207 mm 30.9 lbs. / 14.0 kg 37.9 lbs. / 12.2 kg 49.2 lbs. / 22.3 kg	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J., IoT, EZ-Manager, USB Cloning, Wake of IDMI-CEC) (1.4), IR Out (MPI, RS-232C), J. Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (Iv y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi  In (Dual b-LAN), Optical Digital Audio OAN (RJ45), Aux LAN (RJ45), MPI Port (RJ1 200 × 200 mm 1 pole (Swivel)  Dark Charcoal Gray 44.1x 25.6 x 2.2 in. 1,121 × 651 × 57.1 mm 44.1 x 28.1 x 11.9 in. 1,121 × 713 × 303 mm 51.9 x 31.9 x 7.4 in. 1,317 × 810 × 188 mm 26.7 lbs. / 12.1 kg 33.7 lbs. / 15.3 kg 41.0 lbs. / 18.6 kg	Yes  Ompatibility (MR18HA),  On RF, WOL,  Multi-code IR  1)  HDMI-CEC),  embedded  ce Only (3.5 mm TRS)  ut,  2)  200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  38.1 × 22.2 × 2.2 in.  967 × 564 × 57.1 mm  38.1 × 24.5 × 11.9 in.  967 × 623 × 303 mm  42.3 × 26 × 8.0 in.  1,075 × 660 × 203 mm  19.4 lbs. / 8.8 kg  26.5 lbs. / 12.0 kg  34.0 lbs. / 15.4 kg
Solution  Smart Features  Hospitality Features  Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfe Mobile Co Diagnostics  External Mobile Ro  Set Side  Set Rear  VESA Compatible Stand Type Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Shipping Weight On Bezel Width (L/R/U/B)	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAlonnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, B: 0), If emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L: HDMI In x2 (2.0), USB HDMI In x2 (2.0),	Yes  y Mode, Quick Access, Web Browser, SD, P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (F  ort Block, Welcome Screen (Splash Image Instant On, VLAN ID, RIP (Remote Jack Pe P/Plus HD), Auto Off / Sleep Timer, Energ Pock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea  DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), L  300 × 300 mm  1 pole (Swivel)  Dark Charcoal Gray 48.6 × 28.1 × 2.3 in. 1,235 × 715 × 57.5 mm 48.6 × 30.6 × 11.9 in. 1,235 × 777 × 303 mm 53.5 × 315 × 777 × 303 mm 53.5 × 315 × 715 × 57.5 mm 30.9 lbs. / 14.0 kg 37.9 lbs. / 14.0 kg 49.2 lbs. / 12.8 / 19.9 mm	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake a IDMI-CEC) (1.4), IR Out (MPI, RS-232C), J, Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (I y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi  In (Dual b-LAN), Optical Digital Audio Or AN (RJ45), Aux LAN (RJ45), MPI Port (RJ1 200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  44.1x 25.6 x 2.2 in. 1,121 × 651 × 57.1 mm  44.1x 28.1 x 11.9 in. 1,121 × 713 × 303 mm  51.9 x 31.9 x 7.4 in. 1,317 × 810 × 188 mm  26.7 lbs. / 12.1 kg  33.7 lbs. / 15.3 kg  41.0 lbs. / 18.6 kg	Yes  Compatibility (MR18HA),  Don RF, WOL,  Multi-code IR  1)  HDMI-CEC),  embedded  ce Only (3.5 mm TRS)  ut,  2)  200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  38.1 × 22.2 × 2.2 in.  967 × 564 × 57.1 mm  38.1 × 24.5 × 11.9 in.  967 × 623 × 303 mm  42.3 × 26 × 8.0 in.  1,075 × 660 × 203 mm  19.4 lbs. / 8.8 kg  26.5 lbs. / 12.0 kg  34.0 lbs. / 15.4 kg  12.8 / 12.8 / 12.8 / 19.9 mm
Solution  Smart Features  Hospitality Features  Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfa  Mobile Co Diagnostics  External Mobile Ro  Set Side  Set Rear  VESA Compatible  Stand Type  Front Color Dimensions without Stand (W x H x D) Dimensions with Stand (W x H x D) Shipping Dimensions (W x H x D) Weight without Stand Weight with Stand Weight with Stand Shipping Weight On Bezel Width (L/R/U/B)	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAlonnection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, 1: 1.0 W, 8 0), I emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L. HDMI In x2 (2.0), USB HDMI In x2 (2.0), U	Yes  y Mode, Quick Access, Web Browser, SD, P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Image nstant On, VLAN ID, RIP (Remote Jack Pa P(Plus HD), Auto Off / Sleep Timer, Energ pock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spea  DMI In (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), L  300 × 300 mm  1 pole (Swivel)  Dark Charcoal Gray 48.6 x 28.1 x 2.3 in. 1,235 × 715 × 57.5 mm 48.6 x 30.6 x 11.9 in. 1,235 × 777 × 303 mm 53.5 x 33.9 x 8.1 in. 1,360 × 860 × 207 mm 30.9 lbs. / 14.0 kg 37.9 lbs. / 17.2 kg 49.2 lbs. / 22.3 kg 12.8 / 12.8 / 19.9 mm 6.9 / 6.9 / 6.9 / 18.4 mm	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, Jot, Lot, Edward Compatibility, India Compatibility, India Compatibility, Ireleadapt/Guestlink (I y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi  In (Dual b-LAN), Optical Digital Audio On AN (RJ45), Aux LAN (RJ45), MPI Port (RJ1 200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  44.1x 25.6x 2.2 in. 1,121 × 651 × 57.1 mm  44.1x 28.1x 11.9 in. 1,121 × 713 × 303 mm  51.9x 31.9x 7.4 in. 1,317 × 810 × 188 mm  26.7 lbs. / 12.1 kg  33.7 lbs. / 15.3 kg  41.0 lbs. / 18.6 kg  12.8 / 12.8 / 12.8 / 19.9 mm  7.3 / 7.3 / 7.8 / 18.4 mm	Yes  compatibility (MR18HA),  on RF, WOL,  Multi-code IR  1)  1)  1)  1)  1)  1)  1)  1)  1)  1
Solution  Smart Features  Hospitality Features  Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfa  Mobile Co Diagnostics  External Mobile Ro  Set Side  Set Rear  VESA Compatible  Stand Type  Front Color  Dimensions without Stand (W x H x D)  Dimensions with Stand (W x H x D)  Shipping Dimensions (W x H x D)  Weight without Stand Weight with Stand Shipping Weight On Bezel Width (L/R/U/B)  Off Bezel Width (L/R/U/B)  Power Supply (Voltage, Hz)	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAlonection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, 1: 1.0 W, 8 0), I emote, Moving Picture Playback (SD/HD Anti-theft System (Kensington L HDMI In x2 (2.0), USB  HDMI In x2 (2.0), USB  HITTU-  300 × 300 mm  1 pole (Fixed)  Dark Charcoal Gray  57.2 × 33 × 2.3 in. 1,454 × 838 × 57.7 mm  57.2 × 35.8 × 13.4 in. 1,454 × 909 × 340 mm  63 × 38.2 × 9 in. 1,600 × 970 × 228 mm  47.4 lbs. / 21.5 kg  50.5 lbs. / 22.9 kg  63.7 lbs. / 28.9 kg  12.8 / 12.8 / 12.8 / 19.9 mm  6.8 / 6.8 / 6.8 / 18.4 mm  100-240 Vac, 50/60 Hz	y Mode, Quick Access, Web Browser, SD, P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (Fort Block, Welcome Screen (Splash Imagenstant On, VLAN ID, RIP (Remote Jack Pa) Plus HD), Auto Off / Sleep Timer, Energe pock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Spead DMI in (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), L 300 × 300 mm 1 pole (Swivel)  Dark Charcoal Gray 48.6 x 28.1 x 2.3 in. 1,235 × 715 × 57.5 mm 48.6 x 30.6 x 11.9 in. 1,235 × 717 × 303 mm 53.3 x 8.1 in. 1,236 × 860 × 207 mm 30.9 lbs. / 14.0 kg 37.9 lbs. / 17.2 kg 49.2 lbs. / 22.3 kg 12.8 / 12.8 / 12.8 / 19.9 mm 6.9 / 6.9 / 6.9 / 18.4 mm 100-240 Vac, 50/60 Hz	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, Jo T, EZ-Manager, USB Cloning, Wake of IDMI-CEC) (1.4), IR Out (MPI, RS-232C), J. Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (I y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi  In (Dual b-LAN), Optical Digital Audio On AN (RJ45), Aux LAN (RJ45), MPI Port (RJ1 200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  44.1 x 25.6 x 2.2 in.  1,121 × 651 × 57.1 mm  44.1 x 28.1 x 11.9 in.  1,121 × 713 × 303 mm  51.9 x 31.9 x 7.4 in.  1,317 × 810 × 188 mm  26.7 lbs. / 12.1 kg  33.7 lbs. / 15.3 kg  41.0 lbs. / 18.6 kg  12.8 / 12.8 / 19.9 mm  7.3 / 7.3 / 7.8 / 18.4 mm  100-240 Vac, 50/60 Hz	Yes  Compatibility (MR18HA),  Don RF, WOL,  Multi-code IR  1)  HDMI-CEC),  embedded  ce Only (3.5 mm TRS)  ut,  2)  200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  38.1 × 22.2 × 2.2 in.  967 × 564 × 57.1 mm  38.1 × 24.5 × 11.9 in.  967 × 623 × 303 mm  42.3 × 26 × 8.0 in.  1,075 × 660 × 203 mm  19.4 lbs. / 8.8 kg  26.5 lbs. / 12.0 kg  34.0 lbs. / 15.4 kg  12.8 / 12.8 / 19.9 mm  6.9 / 6.9 / 6.9 / 18.4 mm  100-240 Vac, 50/60 Hz
Solution  Smart Features  Hospitality Features  Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfa  Mobile Co Diagnostics  External Mobile Ro  Set Side  Set Rear  VESA Compatible  Stand Type  Front Color  Dimensions without Stand (W x H x D)  Dimensions with Stand (W x H x D)  Weight without Stand Weight with Stand Shipping Dimensions Weight with Stand Weight with Stand Shipping Weight On Bezel Width (L/R/U/B)  Off Bezel Width (L/R/U/B)  Power Supply (Voltage, Hz) Power Consumption (Typ. / Max.)	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAlonection Overlay, HDMI-ARC (HDMI 2), (IP Remote), SI Compatible Protocol (M Installer Menu, Lock Mode (Limited), Pc Speaker Out (R: 1.0 W, L: 1.0 W, B.0), II. (Speaker Out (R: 1.0 W, L: 1.0 W, B.0), IV. (Speaker Out (R: 1.0 W, L: 1.0 W, B.0), IV. (Speaker Out (R: 1.0 W, L: 1.0 W, B.0), IV. (Speaker Out (R: 1.0 W, L: 1.0 W, B.0), IV. (Speaker Out (R: 1.0 W, L: 1.0 W, B.0), IV. (Speaker Out (R: 1.0	y Mode, Quick Access, Web Browser, SD, P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (Hort Block, Welcome Screen (Splash Imagenstant On, VLAN ID, RIP (Remote Jack Pellus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Speadom (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), Lack CFG (3.5 mm TRS) (b-LAN Service), Lack CFG (3.5 mm TRS) (b-LAN Service), Lack CFG (3.5 mm TRS) (1.0 mm TRS) (1.	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, J, IoT, EZ-Manager, USB Cloning, Wake & IDMI-CEC) (1.4), IR Out (MPI, RS-23C), J, Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (I y Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi In (Dual b-LAN), Optical Digital Audio On AN (RJ45), Aux LAN (RJ45), MPI Port (RJ 200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  44.1 x 25.6 x 2.2 in.  1,121 × 651 × 57.1 mm  44.1 x 28.1 x 11.9 in.  1,121 × 713 × 303 mm  51.9 x 31.9 x 7.4 in.  1,317 × 810 × 188 mm  26.7 lbs. / 12.1 kg  33.7 lbs. / 15.3 kg  41.0 lbs. / 18.6 kg  12.8 / 12.8 / 12.8 / 19.9 mm  7.3 / 7.3 / 7.8 / 18.4 mm  100-240 Vac, 50/60 Hz  112 W / 135 W	Yes  compatibility (MR18HA), on RF, WOL, Multi-code IR  1)  HDMI-CEC), embedded  ce Only (3.5 mm TRS)  ut, 22)  200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  38.1 x 22.2 x 2.2 in. 967 x 564 × 57.1 mm  38.1 x 24.5 x 11.9 in. 967 x 623 x 303 mm  42.3 x 26 x 8.0 in. 1,075 × 660 × 203 mm  19.4 lbs. / 8.8 kg  26.5 lbs. / 12.0 kg  34.0 lbs. / 15.4 kg  12.8 / 12.8 / 12.8 / 19.9 mm  6.9 / 6.9 / 6.9 / 18.4 mm  100-240 Vac, 50/60 Hz  82 W / 119 W
Solution  Smart Features  Hospitality Features  Jack Interface	Pro:Idiom (S/W Type), (Mobile, Lite)  webOS23 User Interfate	Yes  ace, Smart Home (Launcher Bar), Galler SW Clock (World Clock / Alarm), SoftAl Switch (Morld Clock / Alarm), SoftAl Switch (IP Remote), SI Compatible Protocol (Morld Remote), Moving Picture Playback (SD/HD Anti-theft System (Kensington Lemote), Moving Picture Playback (SD/HD Anti-theft System (Kensington Lemote), Moving Picture (Morld Remote), USB HID (Morld Remo	y Mode, Quick Access, Web Browser, SD, P, Wi-Fi, Screen Share (Miracast), Smart Voice Recognition (Standalone/Solution PI, RS-232C), HTNG-CEC (1.4), Simplink (Hort Block, Welcome Screen (Splash Imagenstant On, VLAN ID, RJP (Remote Jack Pe/Plus HD), Auto Off / Sleep Timer, Energock, Credenza/Security Aperture (Except In (2.0), RS-232C In (3.5 mm TRRS), Speadom (2.0), RS-232C In (3.5 mm TRRS), Speadom (2.0), USB In (2.0), Antenna/Cable Link CFG (3.5 mm TRS) (b-LAN Service), Landal Communication (Service), L	Yes  P Server Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, Jot, Lot, Electroth Compatibility, Magic Remote C Share, DIAL, Bluetooth Audio Playback, Jot, EZ-Manager, USB Cloning, Wake of IDMI-CEC (1.4), IR Out (MPI, RS-232C), J., Insert Image, One Channel Map (LCN ck) Compatibility (Teleadapt/Guestlink (IV Saving Mode, Motion Eye Care, b-LAN 65"), Lock Down Plate (Except 65")  ker Out/Line Out (3.5 mm Stereo), Servi In (Dual b-LAN), Optical Digital Audio On AN (RJ45), Aux LAN (RJ45), MPI Port (RJ1 200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  44.1x 25.6x 2.2 in. 1,121 × 751 × 57.1 mm  44.1x 28.1x 11.9 in. 1,121 × 713 × 303 mm  51.9x 31.9x 7.4 in. 1,317 × 810 × 188 mm  26.7 lbs. / 12.1 kg  33.7 lbs. / 15.3 kg  41.0 lbs. / 18.6 kg  12.8 / 12.8 / 12.8 / 19.9 mm  7.3 / 7.3 / 7.8 / 18.4 mm  100-240 Vac, 50/60 Hz  112 W / 135 W  Under 0.5 W	Yes  compatibility (MR18HA), on RF, WOL, Multi-code IR  1)  HDMI-CEC), embedded  ce Only (3.5 mm TRS)  ut, 2)  200 × 200 mm  1 pole (Swivel)  Dark Charcoal Gray  38.1x 22.2 x 2.2 in. 967 × 564 × 57.1 mm  38.1x 24.5 x 11.9 in. 967 × 623 x 303 mm  42.3x 26x 8.0 in. 1,075 × 660 × 203 mm  19.4 lbs. / 8.8 kg  26.5 lbs. / 12.0 kg  34.0 lbs. / 15.4 kg  12.8 / 12.8 / 12.8 / 19.9 mm  6.9 / 6.9 / 6.9 / 18.4 mm  100-240 Vac, 50/60 Hz  82 W / 119 W  Under 0.5 W

<sup>\*</sup> Specifications are subject to change without notice. Please make sure to check the product manual for details about product usage.